


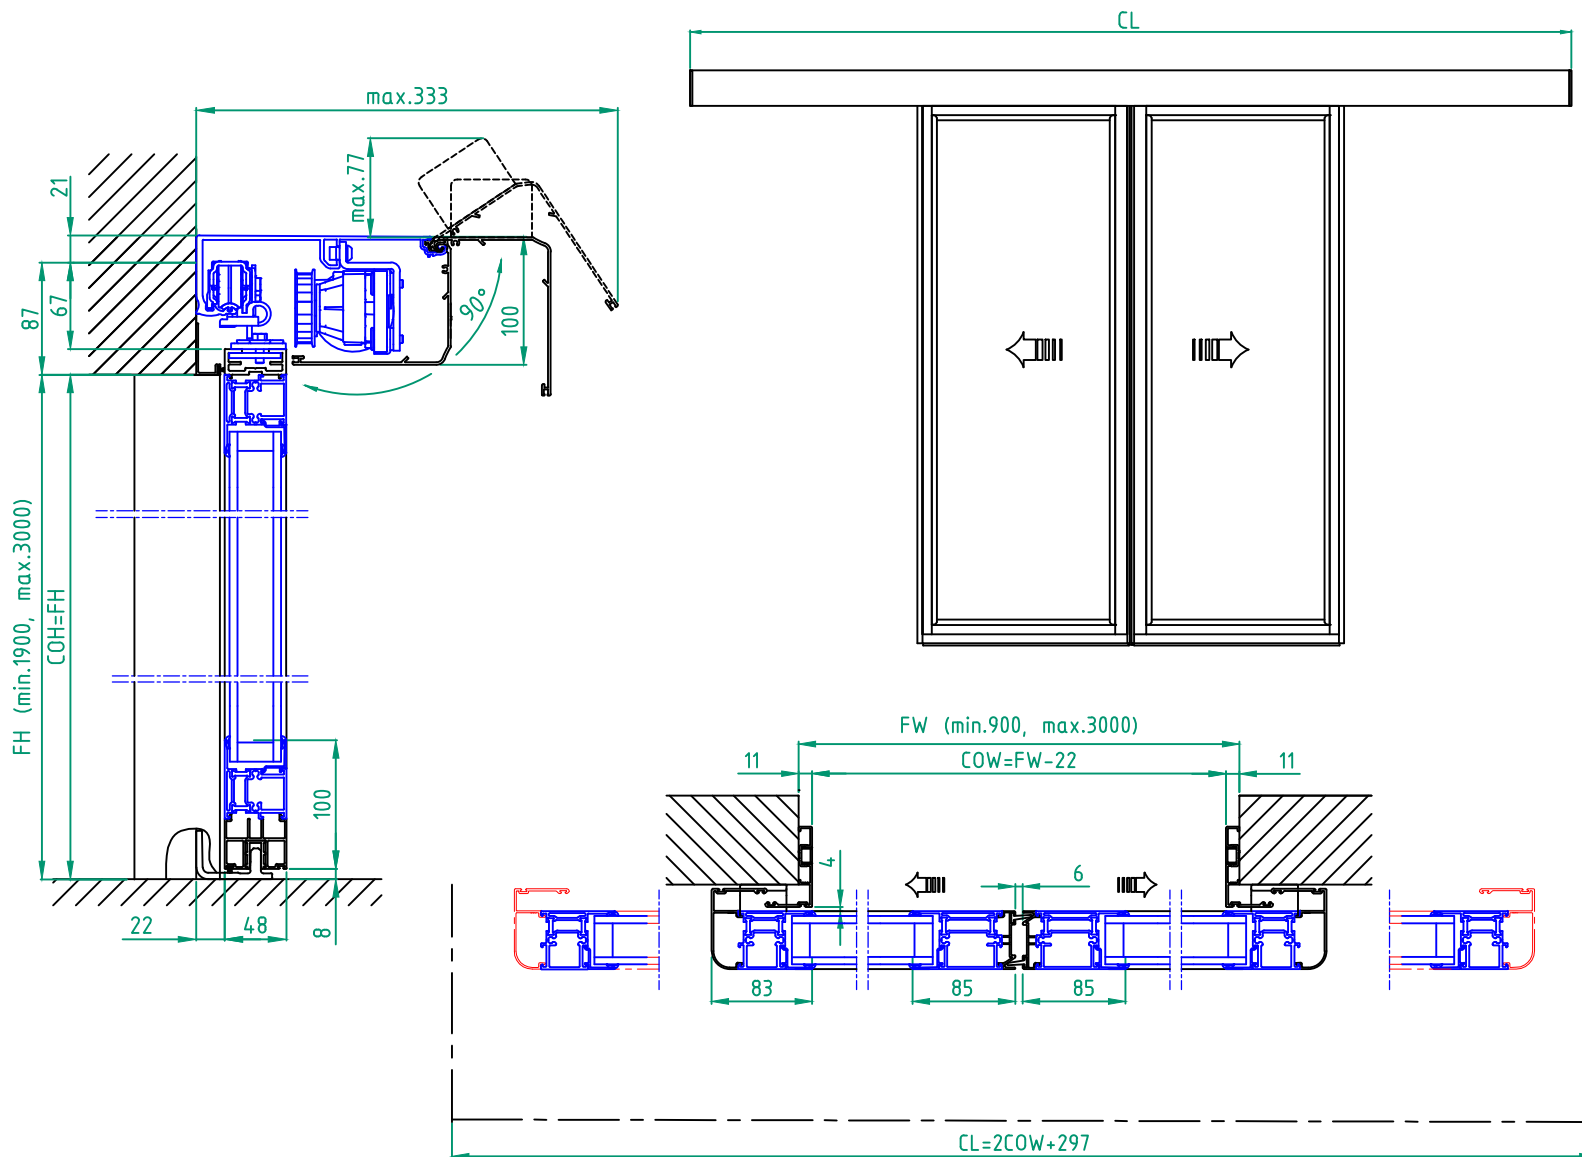

STATE WHEN ORDERING

FW = 2522 mm
 FH = 2100 mm
 COW = 2500 mm
 COH = 2100 mm
 CL = 5521 mm

Surface treatment

☐ Silver anodized
 Special anodized
 RAL 7016MATT
 Special powder coating

Options see layers:

☐ Bottom rail 178
☒ Frame Eco
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm
☐ Threshold floor guide, L = 2FW + 116
☐ TightSeal (floor level difference max. ± 3 mm)

☐ Glass option see drw. 1009026

Glass code:

GI40.2AR

☐ Infill panel:

.....
 Combination of glass and infill panel.
 Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Refer to the document PRA-0004

Notes:

Customer:

Ref:

Door id:

Date:

Project No:

Sign:

Automatic door system
 ASSA ABLOY Frame 2 Panel wall mounted bipart
 Art. No. 1009380-2PB-10
 ASSA ABLOY SL510

ASSA ABLOY

1.0

1023517-en